

Application Manual

Real Time Clock Module

RTC-8564



SEIKO EPSON CORPORATION



*In pursuit of "Saving" Technology, Epson electronic device.
Our Lineup of semiconductors, Liquid crystal displays and quartz devices
assists in creating the products of our customers' dreams.
Epson IS energy savings.*

NOTICE

- No part of this material may be reproduced or duplicated in any form or any means without the written permission of Seiko Epson.*
- Seiko Epson reserves the right to make changes to this material without notice.*
- Seiko Epson does not assume any liability of any kind arising out of any inaccuracies contained in this material or due to its application or use in any product or circuit and, further, there is no representation that this material is applicable to products requiring high level reliability, such as, medical products.*
- Moreover, no license to any intellectual property rights is granted by implication or otherwise, and there is no representation or warranty that anything made in accordance with this material will be free from any patent or copyright infringement of a third party.*
- This material of portions thereof may contain technology or the subject relating to strategic products under the control of the Foreign Exchange and Foreign Trade Control Law of Japan and may require an export license from the Ministry of international Trade and industry or other approval from another government agency.*

CONTENTS

■ Overview	1
■ Block diagram	1
■ Terminal connections	2
■ Terminal description	2
■ Characteristics	3
1. Absolute Maximum Ratings	3
2. Operating Conditions	3
3. Oscillation characteristics	3
4. DC characteristics	3
5. AC characteristics	4
■ Registers	5
1. Register table	5
2. Notes	5
3. Register description	5
3-1. Control register 1	5
3-2. Control register 2	6
3-3. Clock and calendar registers, and VL bit and century bit	6
3-4. Alarm registers	7
3-5. CLKOUT frequency selection and timer registers	7
■ Access procedure	8
1. Characteristic of the I ² C-BUS	8
2. Bit transfer	8
3. Start condition and stop condition	8
4. Slave address	8
5. System structure	9
6. Acknowledge	9
7. I ² C-BUS protocol	10
(1) Procedure for write at specified address	10
(2) Procedure for read at specified address	10
(3) Read procedure without specified address	10
■ Typical connection to micro computers	11
■ External dimension	12
■ Marking layout	12
■ Reference data	13
■ Application notes	14
(1) Notes on handling	14
(2) Notes on packaging	14

I²C-Bus Interface Real Time Clock Module

RTC-8564


- Built-in crystal oscillator running at 32.768kHz
- Compliant with I²C high-speed bus specifications (400kHz)
- Equipped with alarm, timer, and frequency output (32.768kHz, 1024Hz, 32Hz, 1Hz) features
- Inclusion of century bit to enable correct date even after year 2000
- Operating in wide voltage range from 1.8 to 5.5V, and in wide range of clock voltage from 1.2 to 5.5V
- Low power consumption at 275nA/3.0V (Typ.)
- Available in small and thin package (JE: VSOJ-20 pin)

The I²C-BUS is a trademark of PHILIPS ELECTRONICS N.V.


■ Overview

This module is a serial interface real time clock that has a built-in crystal oscillator. The module offers many functions such as calendar clock, alarm, and timer. All of them can be controlled with a two (2) lines interface. Also, the regular frequency output can be selected from programs. Because this module has multiple features packaged in the same surface, it is ideally suited for applications such as mobile phones, handy terminals or other small electronic systems.

■ Block diagram

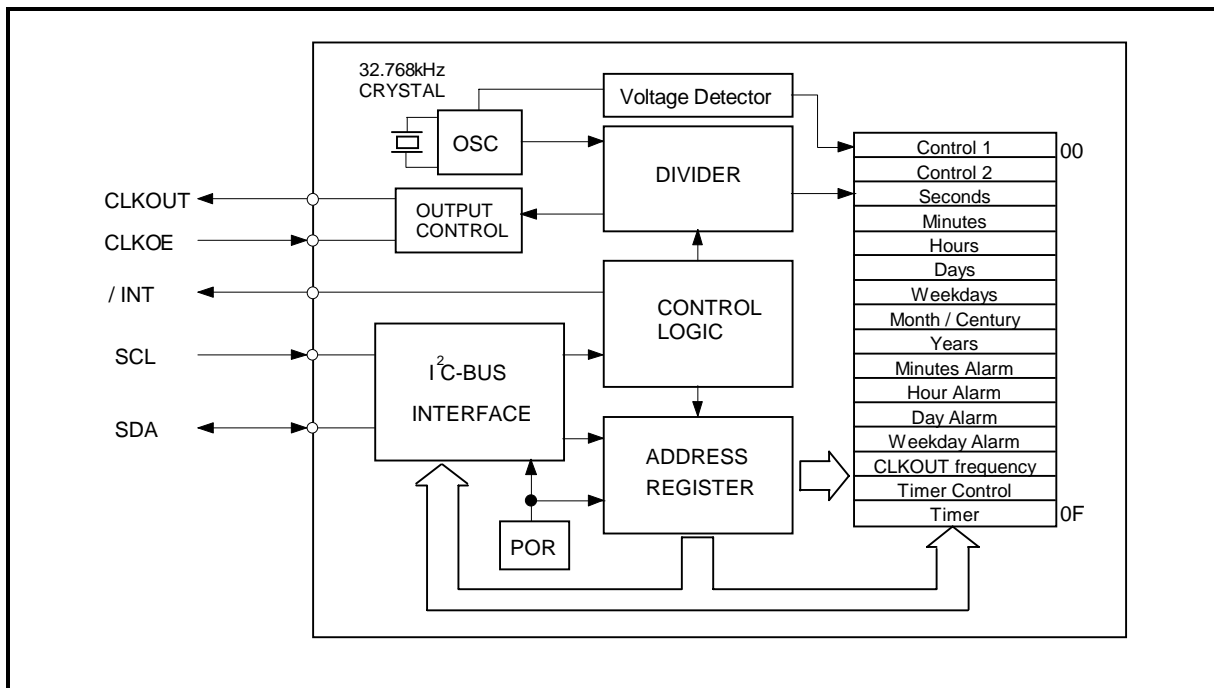

■ Terminal connections

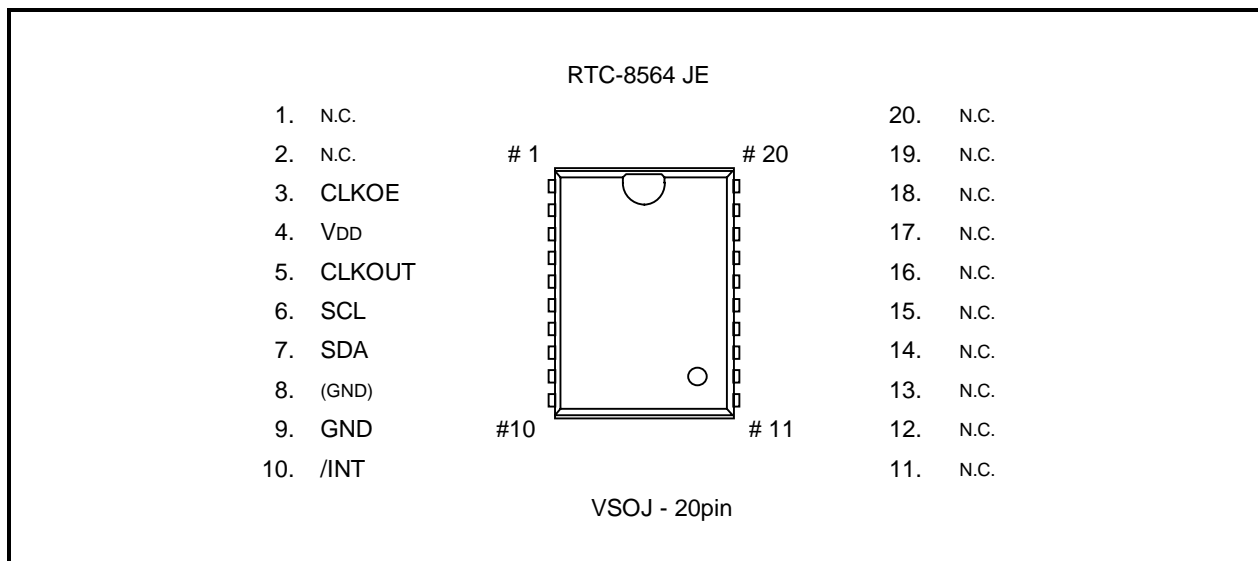

■ Terminal description

Signal name	Pin No.	I/O	Signal description
CLKOE	3	Input	This pin control the frequency output from CLKOUT pin. When this pin is LOW ,frequency output is inhibited by all means. When this pin is HIGH and FE-Bit is "1", frequency output is available.
SCL	6	Input	For input of the serial clock.
SDA	7	Bi-Directional	This pin synchronizes with a serial clock and input/output address, data, acknowledge bit, etc. The pin is an open-drain in output mode. Be sure to use the appropriate pull-up resistors according to the capacitance of the signal lines.
GND	9	-	This pin connects to the ground.
/INT	10	Output	This pin outputs an interrupt signal such as alarm and timer. The pin is an open-drain terminal.
VDD	4	-	This pin connects to the + power source.
CLKOUT	5	Output	This pin outputs frequency (32.768kHz,1024Hz,32Hz,1Hz) selected by the program. The pin is an C-MOS terminal. When initial power is supplied (power supply starting from 0V), the power-on reset function causes 32.768kHz to be output. When output stops, the CLKOUT pin goes to Low. Control of CLKOE pin is necessaryto control this function justly.
N.C.	1-2,11-20	-	This pin is not connected internally. Be sure to connect using OPEN, or GND or VDD
(GND)	8	-	This pin has the same voltage level as GND. Do not connect externally. *1

*1 For RTC-8564JE only, the eighth pin has the same voltage level as GND. Be sure not to connect externally.

*2 Be sure to connect a filter capacity of at least 0.1μF closely between VDD and GND.

■ Characteristics

1. Absolute Maximum Ratings

Parameter	Symbol	Condition	Min.	Max.	Unit
Supply Voltage	V _{DD}	Between V _{DD} and GND	-0.5	+6.5	V
Supply Voltage	I _{DD}	V _{DD} pin	-50	50	mA
Input Voltage	V _I	Input pin	GND-0.5	V _{DD} +0.5	V
Output Voltage	V _O	/INT pin	GND-0.5	V _{DD} +0.5	V
DC Input Current	I _I		-10	10	mA
DC Output Current	I _O		-10	10	mA
Storage Temperature Range	T _{STG}	As single part	-55	+125	°C

2. Operating Conditions

Parameter	Symbol	Condition	Min.	Max.	Unit
Supply voltage range	V _{DD}	I ² C-BUS access at 400 kHz	1.8	5.5	V
Clock voltage range	V _{DD}		V _{LOW}	5.5	V
Operating temperature range	T _{OPR}		-40	+85	°C

3. Oscillation characteristics

Parameter	Symbol	Condition	Max.	Unit
Frequency precision	Δf / f _o	T _a =+25°C, V _{DD} =3.0V	5 ± 23 × 10 ⁻⁶ *	
Frequency voltage characteristics	f/V	T _a =+25°C, V _{DD} =1.2V to 5.5V	± 2 × 10 ⁻⁶	/ V
Frequency temperature characteristics	T _{OP}	T _a =+25°C, -10 to +70°C, V _{DD} =3.0V	+10 × 10 ⁻⁶ / -120 × 10 ⁻⁶	
Oscillation startup-up time	t _{STA}	T _a =+25°C, V _{DD} =1.8V	3	s
Aging	f _a	T _a =+25°C, V _{DD} =3.0V	± 5 × 10 ⁻⁶	/ Year

* Equivalent to 1 minute of monthly deviation

4. DC characteristics

If not specifically indicated, V_{DD}=1.8 to 5.5V, T_a=-40 to

+85°C


Parameter	Symbol	Pin	Condition	Min.	Typ.	Max.	Unit
Power current (during access)	I _{DDO}		f _{SCL} =400kHz f _{SCL} =100kHz			800 200	μA μA
Power current (not during access)	I _{DD}		f _{SCL} =0Hz, V _{DD} =5.0V f _{SCL} =0Hz, V _{DD} =3.0V f _{SCL} =0Hz, V _{DD} =2.0V		330 275 250	800 700 650	nA nA nA
Power current (not during access) (CLKOUT=32.768kHz, LOAD is 0pF)	I _{DD32K}		f _{SCL} =0Hz, V _{DD} =5.0V f _{SCL} =0Hz, V _{DD} =3.0V f _{SCL} =0Hz, V _{DD} =2.0V		2.5 1.5 1.1	3.4 2.2 1.6	μA μA μA
"L" input voltage	V _{IL}			GND-0.5		0.3 × V _{DD}	V
"H" input voltage	V _{IH}			0.7 × V _{DD}		V _{DD} +0.5	V
"L" output voltage	I _{OL} (SDA)	SDA	V _{OL} =0.4V, V _{DD} =5V	-3			mA
"L" output current	I _{OL} (/INT)	/INT	V _{OL} =0.4V, V _{DD} =5V	-1			mA
"L" output current	I _{OL} (CLKOUT)	CLKOUT	V _{OL} =0.4V, V _{DD} =5V	-1			mA
"H" output current	I _{OH} (CLKOUT)	CLKOUT	V _{OL} =0.4V, V _{DD} =5V			1	mA
Leakage current	I _{LO}		V _O =V _{DD} or GND	-1		1	μA
Low voltage detection	V _{LOW}		T _a = - 40 ~ +85 °C T _a = - 20 ~ +70 °C		0.9 0.9	1.1 1.0	V

5. AC characteristics

If not specifically indicated, $V_{DD}=1.8$ to $5.5V$, $T_a=-40$ to $+85^{\circ}C$

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
SCL clock frequency	f _{SCL}				400	kHz
Tolerance spike time on bus	t _{SW}				50	ns
Start condition set-up time	t _{SU, STA}		0.6			μs
Start condition hold time	t _{HD, STA}		0.6			μs
SCL "L" time	t _{LOW}		1.3			μs
SCL "H" time	t _{HIGH}		0.6			μs
SCL and SDA rise time	t _r				0.3	μs
SCL and SDA fall time	t _f				0.3	μs
Data set-up time	t _{SU, DAT}		100			ns
Data hold time	t _{HD, DAT}		0			ns
Stop condition set-up time	t _{SU, STO}		4.0			μs

Timing chart

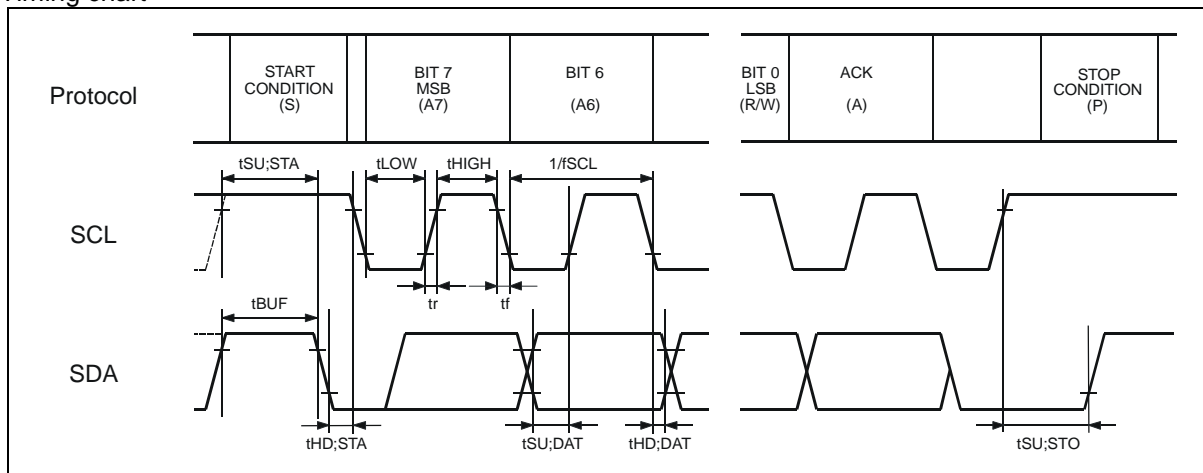

■ Registers

1. Register table

Address	Function	bit 7	bit 6	bit 5	bit 4	bit 3	bit 2	bit 1	bit 0
00	Control 1	TEST	0	STOP	0	TEST	0	0	0
01	Control 2	0	0	0	TI / TP	AF	TF	AIE	TIE
02	Seconds	VL	4	2	1	8	4	2	1
03	Minutes	×	4	2	1	8	4	2	1
04	Hours	×	×	2	1	8	4	2	1
05	Days	×	×	2	1	8	4	2	1
06	Weekdays	×	×	×	×	×	4	2	1
07	Months / Century	C	×	×	1	8	4	2	1
08	Years	8	4	2	1	8	4	2	1
09	Minute Alarm	AE	4	2	1	8	4	2	1
0A	Hour Alarm	AE	4	2	1	8	4	2	1
0B	Day Alarm	AE	×	2	1	8	4	2	1
0C	Weekday Alarm	AE	×	×	×	×	4	2	1
0D	CLKOUT frequency	FE	×	×	×	×	×	FD1	FD0
0E	Timer control	TE	×	×	×	×	×	TD1	TD0
0F	Timer	128	64	32	16	8	4	2	1

2. Notes

- (1) Write to bit '×' is not possible, and its read-out value is not fixed. Be sure to mask it after bit '×' is read out.
- (2) Be sure to set bit '0' of address 00,01 (Control1,2) to zero.
- (3) All count data at address 02 through 05 and 08 through 0B is in the BCD format.
- (4) If data and time are set to impossible values, the clock cannot operate correctly.
- (5) While there is a bit at address 00 for setting the test mode, the test mode is a special operation mode that is used by EPSON for testing devices. Be sure not to set it to 1. If it is set to the test mode, all operations of the device will not be guaranteed. Therefore, be careful when access to address 00.

3. Register description

3.1. Control register 1

Address	Function	bit 7	bit 6	bit 5	bit 4	bit 3	bit 2	bit 1	bit 0
00	Control 1	TEST	0	STOP	0	TEST	0	0	0

TEST: The two TEST bits are for testing devices. Therefore be sure to set them to zeros. If they are accidentally set to 1, they may immediately modify the clock data or result in abnormal time.

STOP: When this bit becomes zero, the device's time function operates. When it is set to 1, all internal count down chain are goes into the zero clear state. If it is cleared together with the time reporting, the time can be adjusted accurately up to one second. As for output of CLKOUT,

STOP doesn't affect frequency output of 32768Hz. But output stops at the time of frequency setting except 32768Hz by STOP =1.

3-2. Control register 2

Address	Function	bit 7	bit 6	bit 5	bit 4	bit 3	bit 2	bit 1	bit 0
01	Control 2	0	0	0	TI/TP	AF	TF	AIE	TIE

TI/TP: If this bit is set to 0, when the timer counts down in the single operation mode and becomes zero, it sets the TF flag and then stops. If this bit is set to 1, when the timer in the repeat mode becomes zero, it sets the TF flag, and it furthermore reload the initial value and repeat to count down. As long as the TF flag is not cleared, the set is maintained.

AF: This is a flag bit which goes into the set state when an alarm occurs.

TF: This is a flag bit which goes into the set state when the timer counts down within the specified cycle and becomes zero.

AIE: This bit determines whether to output the alarm flag state to the /INT pin. When it is set to 1, TF=1 then /INT becomes LOW. When it is set to 0, the information is not output to the /INT pin.


(Note) The /INT pin outputs the logical sum of the respective signal of alarm interrupt and timer interrupt. When an interrupt occurs, the AF/TF flag is read out. Therefore, be sure to check to see which interrupt event has occurred. When alarm and timer are both prohibited, the /INT pin will not become LOW active. If all hardware interrupts cannot be used due to system constraints, after the above setup, be sure to use the software to monitor the interrupt flags for AF and TF.

3-3. Clock and calendar registers, and VL bit and century bit

Address	Function	bit 7	bit 6	bit 5	bit 4	bit 3	bit 2	bit 1	bit 0
02	Seconds	VL	4	2	1	8	4	2	1
03	Minutes	×	4	2	1	8	4	2	1
04	Hours	×	×	2	1	8	4	2	1
05	Days	×	×	2	1	8	4	2	1
06	Weekdays	×	×	×	×	×	4	2	1
07	Months/Century	C	×	×	1	8	4	2	1
08	Years	8	4	2	1	8	4	2	1

If data and time are set to impossible values, the clock cannot operate correctly. Therefore pay attention when handling them.

VL: This is the bit for detecting low voltage. When the power source's voltage drops below $V_{Low}[V]^*$, this flag is set to 1. After the initial power-on, it is set to 1. If this flag is set to 1 after recovery from the backup state, this means during the backup the power was low, and all data need to be initialized. But this bit is intended to detect the situation when VDD is decreasing slowly for example under battery operation. In other words, chattering doesn't detect it. However, because this bit is write cleared regardless of the data, before performing a write to this register, be sure to read out its value.

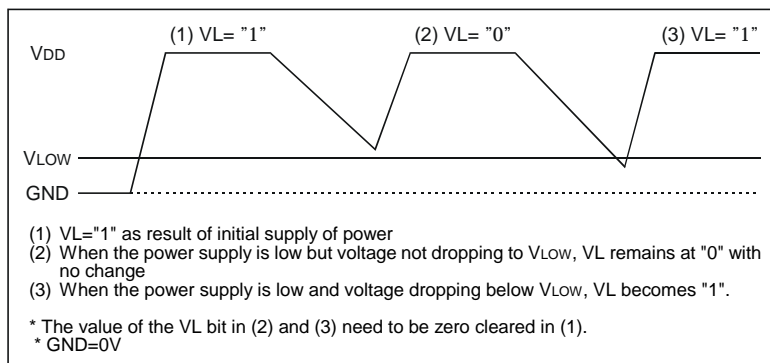

* See the description on DC characteristics.

C: This bit indicates change of century. When the year digit data overflows from 99 to 00, this bit is set. By presetting it to 0 while still in the 20th century, it will be set in year 2000, but in fact the first year in the 21 century should be 2001.

3-4. Alarm registers

Address	Function	bit 7	bit 6	bit 5	bit 4	bit 3	bit 2	bit 1	bit 0
09	Minute Alarm	AE	4	2	1	8	4	2	1
0A	Hour Alarm	AE	4	2	1	8	4	2	1
0B	Day Alarm	AE	×	2	1	8	4	2	1
0C	Weekday Alarm	AE	×	×	×	×	4	2	1

AE: This is the alarm control bit. There is an MSB for each register of minute alarm, hour alarm, day alarm, and day of week alarm. When this bit is set to 1, the appropriate register will be set to have the alarm unconditionally and regardless of the data, and this device is regarded as to have the circuitry working. When the hour digit and the AE of data are set, alarm will occur at the specified minute regardless of the date and time. In other words the alarm will occur at the specified minute of every hour. Similarly, when minute and hour are set to AE, alarm occurs at the specified date. Therefore, by combining them in this way a highly versatile alarm can be set. When all of the bits are set to AE, no alarm will occur.

Additional information on the alarm function:

Even when the alarm is turned on for a long time, this device clears the flag when the alarm occurs once, and so no more further alarm will occur under the same condition. This means in the same day when the alarm condition is met, once the alarm flag is cleared and the alarm becomes unmatched the alarm will not occur unless new condition is met. Therefore, take note of this when using the flag.

3-5. CLKOUT frequency selection and timer registers

Address	Function	bit 7	bit 6	bit 5	bit 4	bit 3	bit 2	bit 1	bit 0
0D	CLKOUT frequency	FE	×	×	×	×	×	FD1	FD0
0E	Timer control	TE	×	×	×	×	×	TD1	TD0
0F	Timer	128	64	32	16	8	4	2	1

• Frequency output

Output frequency	FD1	FD0
32768Hz	0	0
1024Hz	0	1
32Hz	1	0
1Hz	1	1

At the above setting, the output frequency of the CLKOUT pin can be selected. Output is possible when the FE of MSB of the D register is 1. (When it stops, the CLKOUT pin goes to LOW.) These output is controlled by CLKOE pin. When CLKOE input is LOW, CLKOUT output is inhibited.

• Timer control

Timer source clock	TD1	TD0
4096Hz	0	0
64Hz	0	1
1 second	1	0
1 minute	1	1

At the above setting, the count down rate of the timer can be selected. When the TE of MSB of the E register is 1, the timer count down starts, and stops when it becomes 0. The F register data counts down at the set frequency and when it becomes zero TF is set. When the F register is read, the data during count down is read out.

• Timer register

It sets the initial value of the timer's count down. The format is binary.

■ Access procedure

1. Characteristic of the I²C-BUS


I²C-BUS is a bi-directional interface that uses two (2) lines. This interface has two signal lines, which are SDA (data line) and SCL (clock line). Both of these lines are connected to the V_{DD} line via the pull-up registers. All ports must be open drain or open collector on the I²C-BUS in order to be able to connect multiple devices on this bus using the AND-connection.

2. Bit transfer

The bit data transfer is executed for one bit on each one clock pulse of SCL line. When the device transmits the data, the data change should be executed while SCL line is at LOW. When the device receives the data, the data should be taken in while SCL is at HIGH.

3. Start condition and stop condition

When I²C-BUS is not interfacing, the two control lines keep at HIGH. When SDA changes from HIGH to LOW, this is defined as a start condition. After that, actual data transfer is executed. When SCL is at HIGH and when SDA changes from LOW to HIGH, this is defined as a stop condition.

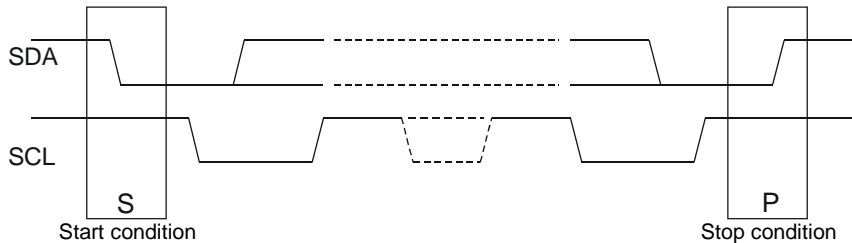


4. Slave address


The I²C-BUS devices do not have any chip select pins with the usual logic devices. All I²C-BUS devices have a fixed unique device number for each device built into them. The chip selection on the I²C-BUS is executed when the communication starts and this device number is sent from I²C-BUS as a slave address. The receiving device responds to the communication only if it matches the slave address.

The slave address is a 7-bit data which is made of a 4-bit fixed data (group 1) and 3-bits data (group 2). On the RTC-8564, the data in group 1 is 1010 and in group 2 is 001.

RTC-8564 slave address




During the actual data transmission, the transmitted data contains both the slave address and the 8-bit data with the added R/W (read/write) bit.

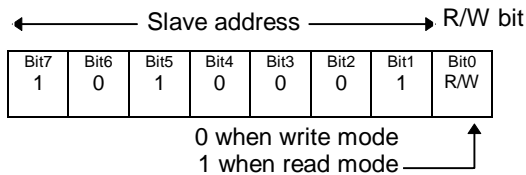

5. System structure

A master is defined as a device that controls interfacing of messages, and a slave is defined as a device which is controlled by the master. A transmitter is defined as a device transmitting messages, and a receiver is defined as the one receiving messages. In the case of the RTC-8564, controllers such as CPU are masters and the RTC-8564 is a slave. Each device can be transmitter and receiver.

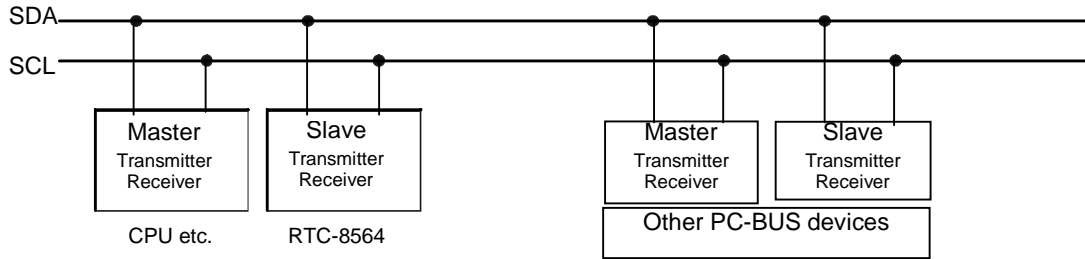

6. Acknowledge

There is no limit to the byte size of data transmitted between the start and stop conditions. For each byte during interfacing, the receiver (receiving end) generates an acknowledge bit to the transmitter (sending end) to confirm that it has received the data. Because the acknowledge bit is LOW active, the transmitter sets the SDA line to HIGH, and sends out a clock pulse for the acknowledge bit. If the receiver can correctly receive the 8-bit data from the transmitter, it will set the SDA line to LOW when the clock for the last bit is finished. Because the I²C-BUS lines are pulled-up, the SDA line of transmitter also turns to LOW. At this moment, the transmitter checks that the acknowledge has returned, and then continues to send out the next data. When the clock pulse for the acknowledge bit is finished, the receiver turns the SDA line to HIGH (release) and prepares to receive the next data.

When a master device is acting as a transmitter and acknowledge is confirmed from the receiver, if the next data is not sent/received but the stop condition is generated, it is possible to terminate the communication normally. When a master device is acting as a receiver and acknowledge bit is sent out as "1", it is possible to terminate the communication normally if the stop condition is generated.


7. I²C-BUS protocol

The following section describes the communications procedure where the master is CPU and the slave is the RTC-8564.

(1) Procedure for write at specified address

The RTC-8564 has an auto increment function of address. After the initial address is set, if only data continues to be sent, the receiving address on the 8564 is incremented by 1 byte. The procedure as follows:


- (1) The CPU sends out a start condition.
- (2) The CPU sends out the slave address of the 8564 and the R/W bit, in write mode.
- (3) Confirm acknowledge from the 8564.
- (4) The CPU sends out the write address to the 8564.
- (5) Confirm acknowledge from the 8564.
- (6) The CPU sends out the data for write to the address specified in step (4).
- (7) Confirm acknowledge from the 8564.
- (8) If necessary repeat steps (6) and (7). The address will be automatically incremented internally on the 8564.
- (9) The CPU sends out the stop condition.



(2) Procedure for read at specified address

According to the write mode, after the address to read is written, the read mode is set and the actual data read. The procedure as follows:


- (1) The CPU sends out a start condition.
- (2) The CPU sends out the slave address of the 8564 and the R/W bit, in write mode.
- (3) Confirm acknowledge from the 8564.
- (4) The CPU sends out the address read out from the 8564.
- (5) Confirm acknowledge from the 8564.
- (6) The CPU sends out the start condition (stop condition is not sent.)
- (7) The CPU sends out the slave address of the 8564 and the R/W bit, in read mode.
- (8) Confirm acknowledge from the 8564. (From here on, the CPU acts as a receiver and the 8564 as a transmitter.)
- (9) Data at the address specified in step (4) is sent out from the 8564.
- (10) The CPU sends out acknowledge to the 8564.
- (11) If necessary repeat steps (9) and (10). The read address will be automatically incremented internally on the 8564.
- (12) The CPU sends out the stop condition.




(3) Read procedure without specified address

Immediately after the read mode is set up, data can be read. In this case, the address is the address when the previous access ended, plus 1. The procedure is as follows:

- (1) The CPU sends out a start condition.
- (2) The CPU sends out the slave address of the 8564 and the R/W bit, in read mode.
- (3) Confirm acknowledge from the 8564. (From here on, the CPU acts as a receiver and the 8564 as a transmitter.)
- (4) Data at the last address in the previous access plus 1 is sent out from the 8564.
- (5) The CPU sends out acknowledge to the 8564.
- (6) If necessary repeat steps (4) and (5). The read address will be automatically incremented internally on the 8564.
- (7) The CPU sends out acknowledge of "1".
- (8) The CPU sends out the stop condition.




■ Typical connection to micro computers

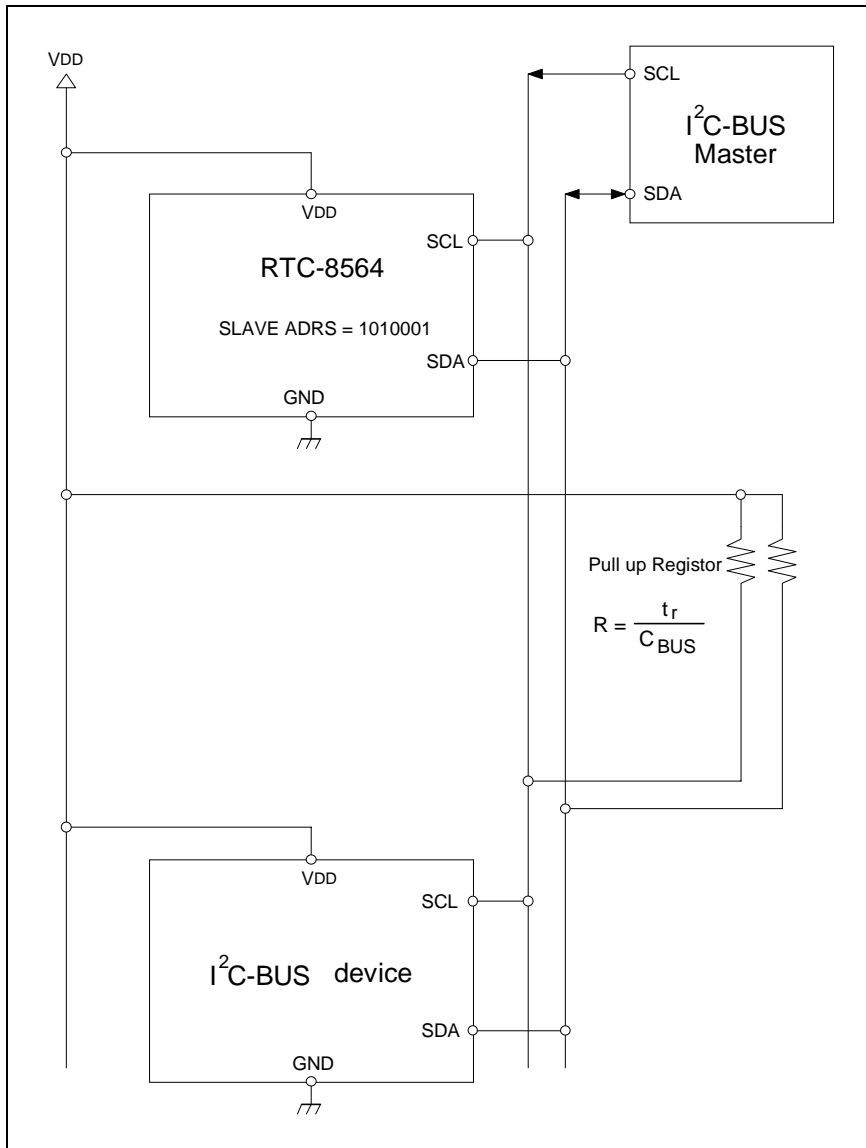


■ External dimension

- RTC-8564JE (VSOJ 20-pin)

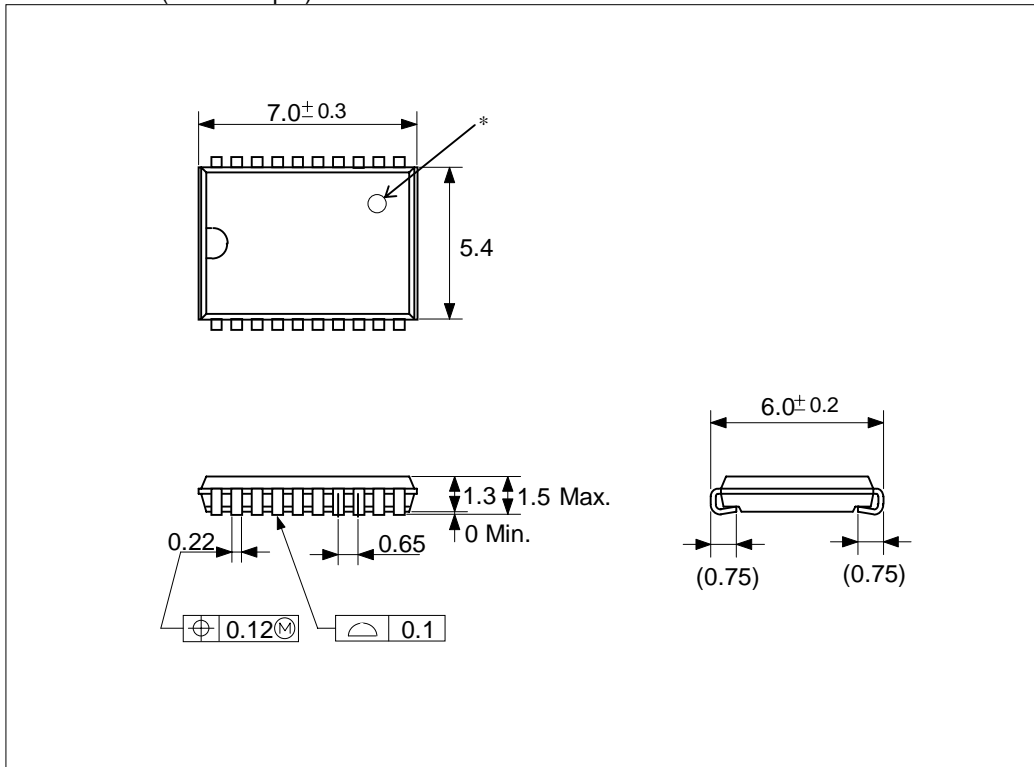

* In this area, (front, back) the crystal oscillator's cylinder may be visible. This has no influence on the characteristics of the device.


■ Marking layout

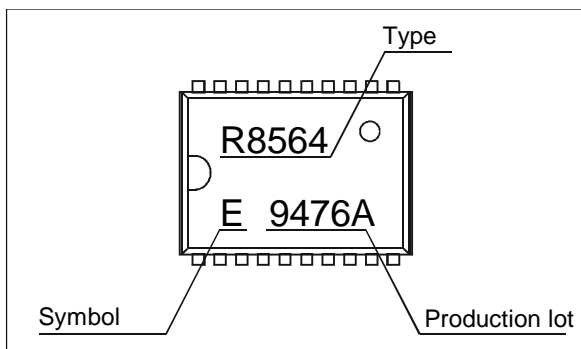

Note: The above indication shows the markings and outlines their general positions. It is not a specification of the type faces, sizes, and positions of the characters.

■ Reference data

(1) Frequency temperature characteristics example

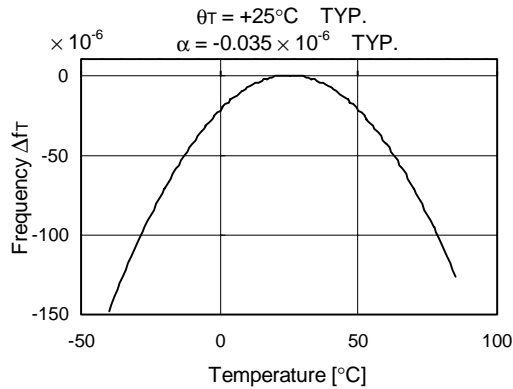


Finding the frequency stability (clock accuracy)

1. The frequency temperature characteristics can be approximated by using the following formula:

$$\Delta fT = \alpha (\theta_T - \theta_X)^2$$

ΔfT	: Frequency deviation at target emperature
α ($1 / ^\circ\text{C}^2$)	: Secondary temperature coefficient ($-0.035 \pm 0.005 \times 10^{-6} / ^\circ\text{C}^2$)
θ_T ($^\circ\text{C}$)	: Peak temperature ($+25 \pm 5$ $^\circ\text{C}$)
θ_X ($^\circ\text{C}$)	: Target temperature

(2) Example of the frequency/voltage characteristics

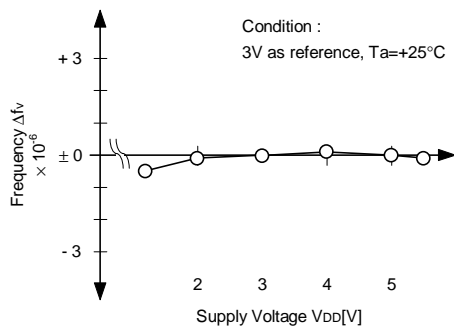

2. To determine the overall clock accuracy, add the frequency precision and the voltage characteristics:

$$\Delta f/f = \Delta f/f_0 + \Delta fT + \Delta fV$$



$\Delta f/f$: Clock accuracy at a given temperature and voltage (frequency stability)
$\Delta f/f_0$: Frequency precision
ΔfT	: Temperature dependent frequency deviation
ΔfV	: Voltage dependent frequency deviation

3. Finding the daily deviation:

$$\text{Daily deviation} = \Delta f/f \times 86400(\text{seconds})$$

$$\text{The clock error is one second per day at } 11.574 \times 10^{-6}$$

(3) Example of the current consumption/voltage characteristics

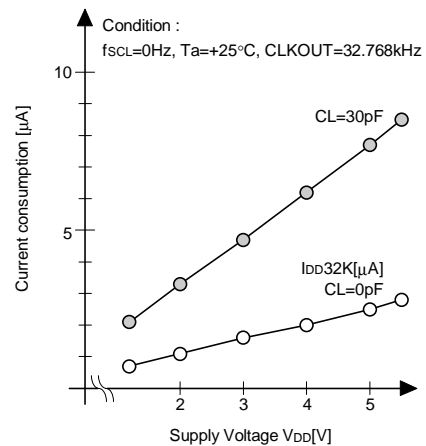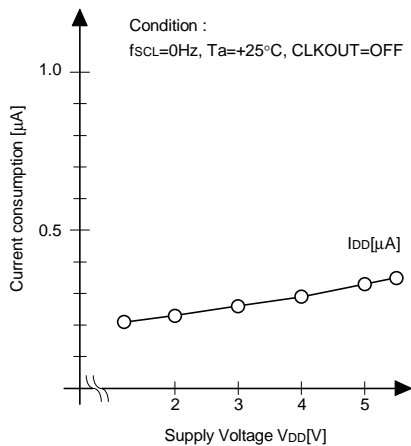

■ Application notes

(1) Notes on handling


In order to enable this module to operate at low power level, the C-MOS circuitry was used in the design of the chip. Note the following cautions when handling it:

1. Static electricity

While this module has built-in circuitry designed to protect it against electrostatic discharge, the chip could still be damaged by a large discharge of static electricity. Containers used for packing and transport should be constructed of conductive materials. In addition, only soldering irons, measurement circuits, and other such devices which do not leak high voltage should be used with this module, which should also be grounded when such devices are being used.

2. Noise

If a signal with excessive external noise is applied to the power supply or input pins, the device may malfunction or "latch up." In order to ensure stable operation, connect a filter capacitor (preferably ceramic) of greater than 0.1μF as close as possible to the power supply pins (between VDD and GNDs). Also, avoid placing any device that generates high level of electronic noise near this module. Do not connect signal lines to the shaded area in the figure shown on the right and, if possible, embed this area in a GND land.



3. Voltage levels of input pins

When the input pins are at the mid-level, this will cause increased current consumption and a reduced noise margin, and can impair the functioning of the device. Therefore, try as much as possible to apply the voltage level close to VDD or GND.

4. Handling unused input pins except (VDD) pin


Since the input impedance of the input pins is extremely high, operating the device with these pins in the open circuit state can lead to unstable voltage level and malfunctions due to noise. Therefore, pull-up or pull-down resistors should be provided for all unused input pins.

(2) Notes on packaging

1. Soldering temperature conditions

If the temperature within the package exceeds 260, the characteristics of the crystal oscillator will be degraded and it may be damaged. Therefore, always check the mounting temperature before mounting this device. Also, check again if the mounting conditions are later changed.

* Soldering conditions of SMD products: Not higher than 260 for no more than twice at 10 seconds, or not higher than 230 for no more than 3 minutes

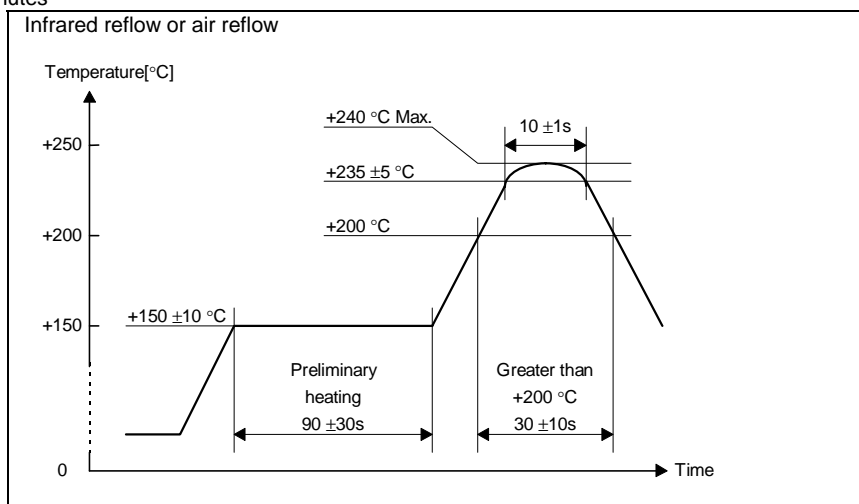

2. Mounting equipment

While this module can be used with general-purpose mounting equipment, the internal crystal oscillator may be damaged in some circumstances, depending on the equipment and conditions. Therefore, be sure to check this. In addition, if the mounting conditions are later changed, the same check should be performed again.

3. Ultrasonic cleaning

Depending on the usage conditions, there is a possibility that the crystal oscillator will be damaged by resonance during ultrasonic cleaning. Since the conditions under which ultrasonic cleaning is carried out (the type of cleaner, power level, time, state of the inside of the cleaning vessel, etc.) vary widely, this device is not warranted against damage during ultrasonic cleaning.

4. Mounting orientation

This device can be damaged if it is mounted in the wrong orientation. Always confirm the orientation of the device before mounting.

5. Leakage between pins

Leakage between pins may occur if the power is turned on while the device has condensation or dirt on it. Make sure the device is dry and clean before supplying power to it.

EPSON

Application Manual

RTC-8564

Distributor

AMERICA

EPSON ELECTRONICS AMERICA, INC.

1960 East Grand Avenue, El Segundo, CA 90245 U.S.A.
Phone (1)310-955-5300 Fax (1)310-955-5400

EUROPE

EPSON EUROPE ELECTRONICS GmbH

Riesstrasse 15, 80992 Muenchen Germany
Phone: (49)-(0)89-14005-0 Fax: (49)-(0)89-14005-110

EPSON EUROPE ELECTRONICS GmbH (Leverkusen Office)

Breidenbachstrasse 46 D-51373 Leverkusen Germany
Phone : (49)-(0)214-83070-0 Fax: (49)-(0)214-83070-10

EPSON EUROPE ELECTRONICS GmbH (UK Branch Office)

G6 Doncastle House Doncastle Road Bracknell Berkshire RG12 8PE England
Phone: (44)-(0)1344-381700 Fax: (44)-(0)1344-381701

EPSON EUROPE ELECTRONICS GmbH (French Branch Office)

1 Avenue de l' Atlantique LP 915 Les Conquerants Z.A. de Courtaboeuf 2
F-91976 Les Ulis Cedex France
Phone: (33)-(0)1-64862350 Fax: (33)-(0)1-64862355

ASIA

EPSON HONG KONG LTD.

20/F., Harbour Centre, 25 Harbour Road, Wanchai, Hong kong
Phone: (852) 2585-4600 Fax: (852) 2827-2152

EPSON TAIWAN TECHNOLOGY & TRADING LTD.

10F, No.287, Nanking East Road, Sec.3, Taipei, Taiwan
Phone: (886) 2-2717-7360 Fax: (886)2-2718-9366

EPSON SINGAPORE PTE. LTD.

No.1, Temasek Avenue #36-00, Millenia Tower, Singapore 039192
Phone: (65) 337-7911 Fax: (65) 334-2716

EPSON (CHINA) CO., LTD.

4F, Bldg.,27, No.69, Guijing Road, Caoheijing, Shanghai, CHINA
Phone: (86) 21-6485-0835 Fax: (86) 21-6485-0775

EPSON ELECTRONIC TECHNOLOGY DEVELOPMENT (SHENZHEN)CO., LTD.

Flat 16A, 16/F, New Times Plaza, No1 Taizi Road, Shenzhen, CHINA
Phone: (86) 755-6811118 Fax: (86) 755-6677786

SEIKO EPSON CORPORATION KOREA Office

10F, KLI 63 Building,60 Yoido-dong, Youngdeungpo-Ku, Seoul, 150-763, Korea
Phone: (82) 2-784-6027 Fax: (82) 2-767-3677

SEIKO EPSON CORPORATION
ELECTRONIC DEVICE MARKETING DEPARTMENT

Electronic devices information on WWW server

<http://www.epson.co.jp/device/>